

|                                        |                        |                                                   |             |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|
| WAAS<br>CH <b>56223</b><br><b>W03A</b> | APP CRS<br><b>028°</b> | Rwy Idg<br>TDZE <b>888</b><br>Apt Elev <b>918</b> | <b>8003</b> |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|

RNAV (GPS) RWY 3

APPLETON INTL (ATW)

▼


▲

Baro-VNAV NA below -16°C (4°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Green Bay-Austin Straubel Intl altimeter setting and increase all DAs/MDAs 100 feet. Baro/VNAV and VDP NA when using Green Bay-Austin Straubel Intl altimeter setting. For inoperative MALSR increase LPV visibility to RVR 4000 all Cats.

MALSR

MISSED APPROACH:  
Climb to 2700 direct ASIGE and hold.

|                       |                                          |                                          |                         |                         |
|-----------------------|------------------------------------------|------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>127.15</b> | GREEN BAY APP CON★<br><b>126.3 338.2</b> | APPLETON TOWER★<br><b>119.6 (CTAF) 0</b> | GND CON<br><b>121.7</b> | UNICOM<br><b>122.95</b> |
|-----------------------|------------------------------------------|------------------------------------------|-------------------------|-------------------------|

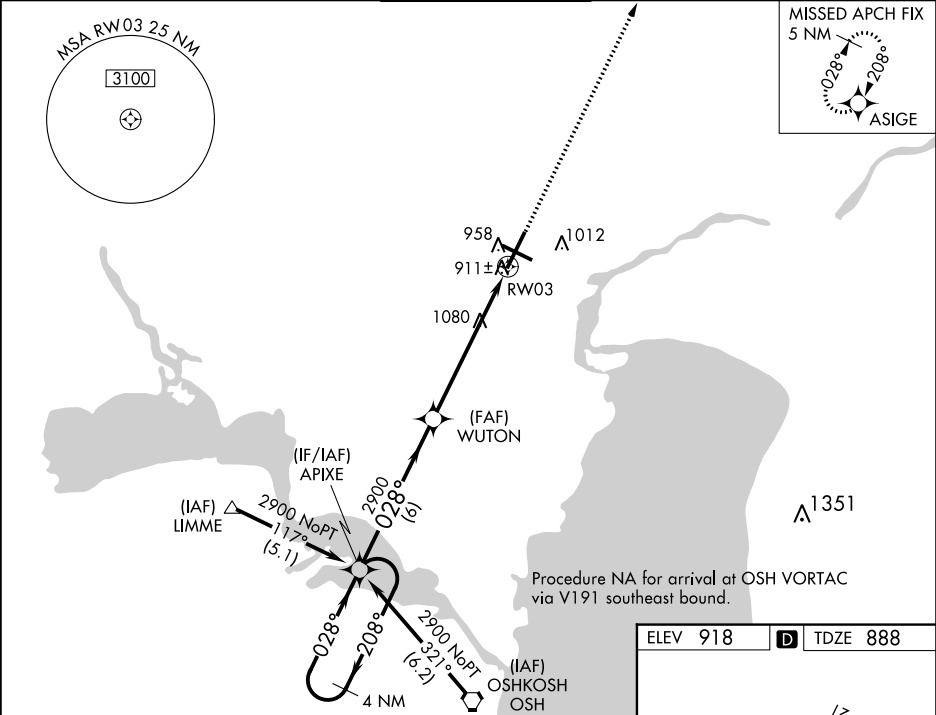

|                      |         |             |                        |                        |       |
|----------------------|---------|-------------|------------------------|------------------------|-------|
| 4 NM Holding Pattern |         | APIXE       | WUTON                  | 2700                   | ASIGE |
| 2900 ← 208°          |         | → 028°      | → 028°                 | *1.5 NM to RW03        |       |
| GP 3.00°             |         | 2900        | *LNAV only             |                        | RW03  |
| TCH 47               |         | 6 NM        | 4.6 NM                 | 1.5 NM                 |       |
| CATEGORY             | A       | B           | C                      | D                      |       |
| LPV DA               | 1138/24 |             | 250 (300-½)            |                        |       |
| LNAV/VNAV DA         | 1232/40 |             | 344 (400-¾)            |                        |       |
| LNAV MDA             | 1400/24 | 512 (500-½) | 1400/50<br>512 (500-1) | 1400/60<br>512 (500-¼) |       |
| CIRCLING             | 1400-1  | 482 (500-1) | 1400-1½<br>482 (500-½) | 1480-2<br>562 (600-2)  |       |

