

WAAS CH 93804 W18A	APP CRS 176°	Rwy Idg 5201 TDZE 1277 Apt Elev 1277
--	------------------------	---



RNAV (GPS) RWY 18
WELLINGTON MUNI (EGT)

RNP APCH

NA Baro-VNAV and VDP NA when using Wichita Dwight D Eisenhower Ntl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Wichita Dwight D Eisenhower Ntl altimeter setting: increase LPV DA to 1531 feet; increase LNAV/VNAV DA to 1776 feet; increase all MDAs 60 feet and LNAV Cuts C/D visibility $\frac{1}{8}$ SM and Circling Cuts C/D visibility $\frac{1}{8}$ SM.

MISSED APPROACH:
Climb to 3000 direct
GOTPE and hold.

AWOS-3P 118.875	WICHITA APP CON 134.85	UNICOM 122.8 (CTAF) 0
---------------------------	----------------------------------	--

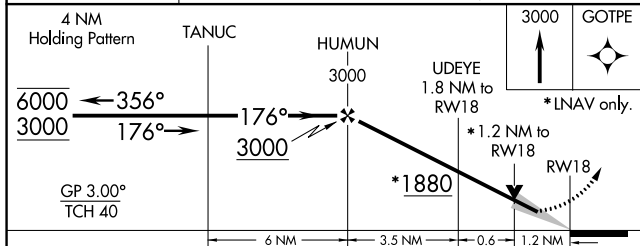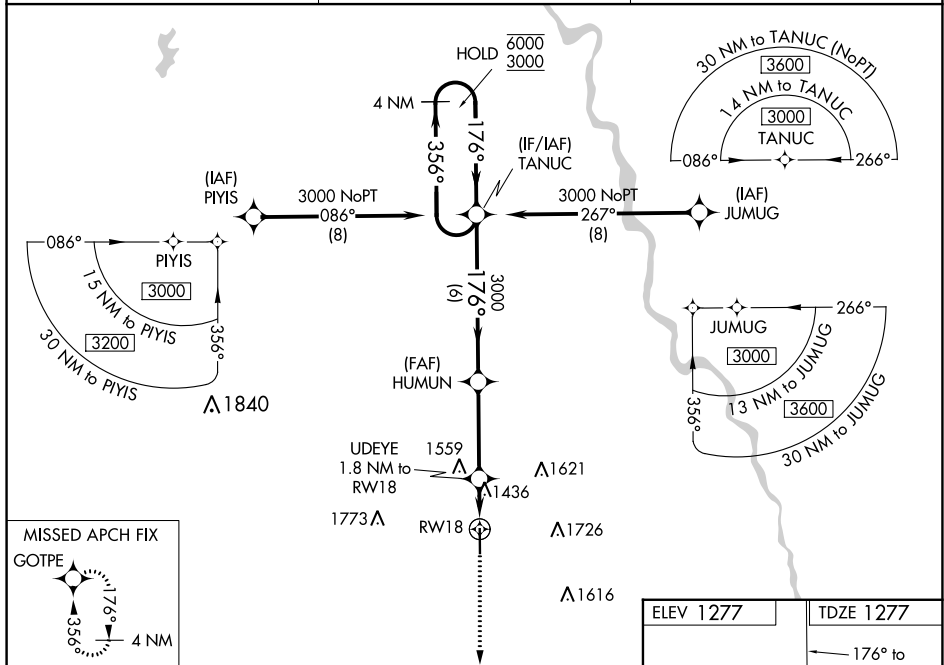

CATEGORY	A	B	C	D
LPV DA	1477-1 200 (200-1)			
LNAV/ VNAV DA	1722-1 $\frac{3}{8}$ 445 (500-1 $\frac{3}{8}$)			
LNAV MDA	1700-1 423 (500-1)		1700-1 $\frac{1}{4}$ 423 (500-1 $\frac{1}{4}$)	
C CIRCLING	1760-1 483 (500-1)		2040-2 $\frac{1}{4}$ 763 (800-2 $\frac{1}{4}$)	2140-2 $\frac{3}{4}$ 863 (900-2 $\frac{3}{4}$)

