


# RNAV (RNP) Z RWY 26L

EL PASO INTL (ELP)


APP CRS <b>265°</b>	Rwy Idg <b>9025</b>
	TDZE <b>3962</b>
	Apt Elev <b>3962</b>

ASR	For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 50°C (122°F). For inop MALSRS, increase RNP 0.30 visibility all Cats to 1 mile. GPS Required.	MALSRS	MISSED APPROACH: Climb to 4400, then climbing right turn to 7500 direct FABAN and hold.


D-ATIS <b>120.0 254.3</b>	EL PASO APP CON <b>124.25 298.85</b>	EL PASO TOWER <b>118.3 239.275</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>125.0 379.1</b>
------------------------------	---	---------------------------------------	-------------------------------	--------------------------------

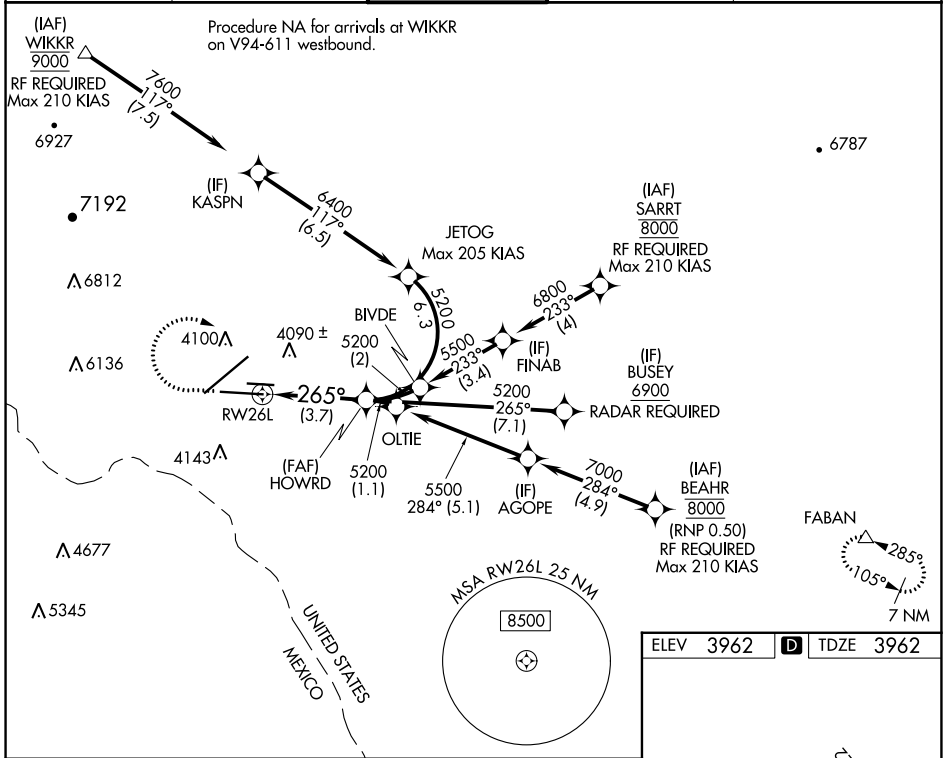

4400	7500	FABAN
VGSI and glidepath not coincident (VGSI Angle 3.00/TCH 75).		

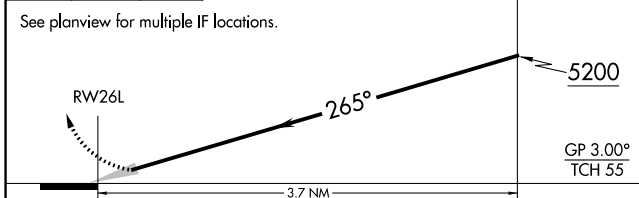

ELEV 3962	<b>D</b>	TDZE 3962
-----------	----------	-----------

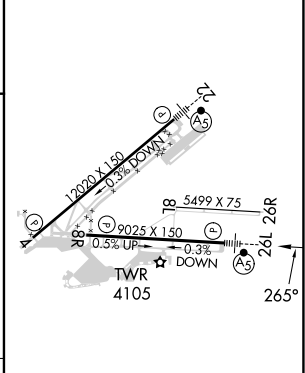

CATEGORY	A	B	C	D
RNP 0.30 DA		4275-1/2	313 (400-1/2)	
<b>AUTHORIZATION REQUIRED</b>				

MIRL Rwy 8L-26R  
 REIL Rws 4 and 8R  
 HIRL Rws 4-22 and 8R-26L