


|         |          |       |
|---------|----------|-------|
| APP CRS | Rwy Idg  | 10014 |
| 063°    | TDZE     | 258   |
|         | Apt Elev | 305   |

RNAV (GPS) Y RWY 6R

GUAM INTL (GUM)(PGUM)

|                                                                                                                                                                              |       |                                                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------------------------------------------------------|
| RNP APCH - GPS.                                                                                                                                                              | MALSR | MISSED APPROACH: Climb to 3000 direct CIBOL and hold. |
| ▼ Rwy 6R helicopter visibility reduction below ¾ SM NA. For inop ALS, increase Cat A and B visibility to 1 SM, and Cat C and D to 2 SM. Circling NA southeast of Rwy 6R-24L. |       |                                                       |

|       |             |             |             |          |
|-------|-------------|-------------|-------------|----------|
| ATIS  | GUAM CERAP  | AGANA TOWER | GND CON     | CLNC DEL |
| 119.0 | 119.8 269.0 | 118.1 340.2 | 121.9 336.4 | 121.9    |

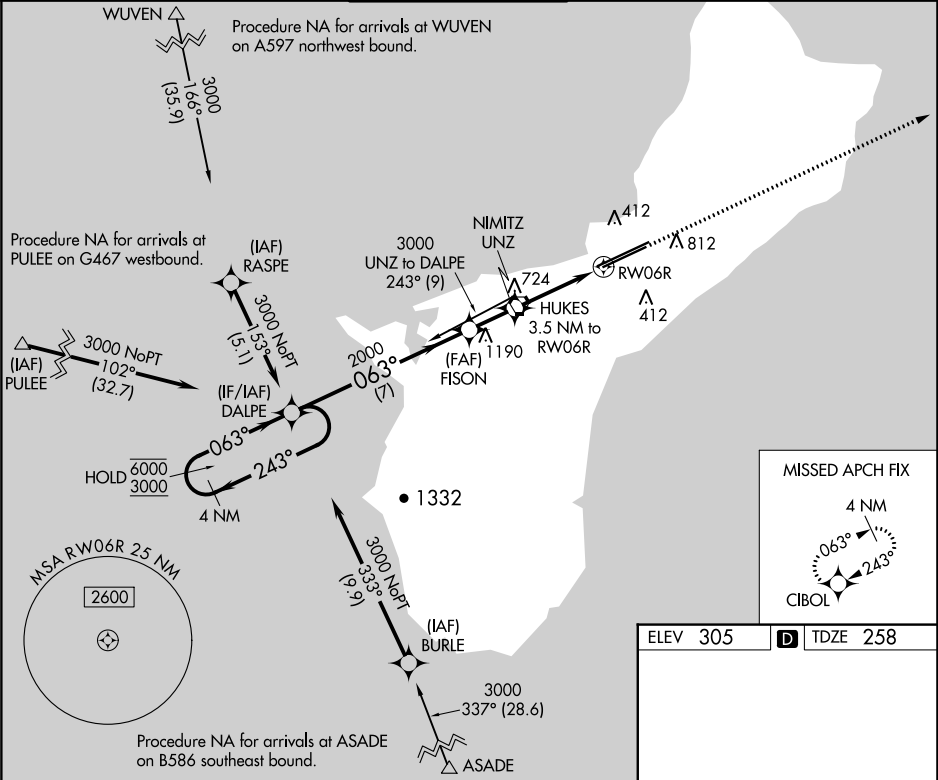

|                                                                     |                       |       |                         |                                                   |                 |            |
|---------------------------------------------------------------------|-----------------------|-------|-------------------------|---------------------------------------------------|-----------------|------------|
| VGSi and descent angles not coincident<br>(VGSi Angle 3.00/TCH 76). |                       |       |                         |                                                   | 3000<br>↑       | CIBOL<br>✦ |
| 4 NM<br>Holding Pattern                                             |                       | DALPE | FISON                   | HUKES<br>3.5 NM to<br>RW06R<br>2.1 NM to<br>RW06R |                 |            |
| 6000<br>3000<br>←243°<br>063°→                                      |                       | 063°  | 2000                    | 1440                                              | 3.11°<br>TCH 55 | RW06R      |
|                                                                     |                       | 7 NM  |                         | 1.8 NM                                            | 1.4 NM          | 2.1 NM     |
| CATEGORY                                                            | A                     | B     | C                       | D                                                 |                 |            |
| RNAV MDA                                                            | 980-3/4 722 (700-3/4) |       | 980-15/8 722 (700-15/8) |                                                   |                 |            |
| CIRCLING                                                            | 980-1 675 (700-1)     |       | 980-2 675 (700-2)       |                                                   | NA              |            |