


NDB RWY 23

NDB FK 273	APCH CRS 225°	Rwy Idg 10,926 TDZE 571 Arpt Elev 571
---------------	------------------	--


AL-679 [USA]

CAMPBELL AAF (KHOP)

RADAR required * When ALS inop, increase CAT AB RVR to 55, vis to 1mile; CAT CD vis to 1½ miles. **Circling not authorized SE of Rwy 5-23.		SSALR (A3)	MISSED APPROACH: Climb to 1200, then climbing right turn to 2500 direct to FK LOM and continue climb-in-hold (max 230 KIAS).		
ATIS 125.175 308.4	APP CON 118.1 269.525	TOWER 120.9 278.8	GND CON 121.8 266.8	CLNC DEL 138.8	ASR/PAR

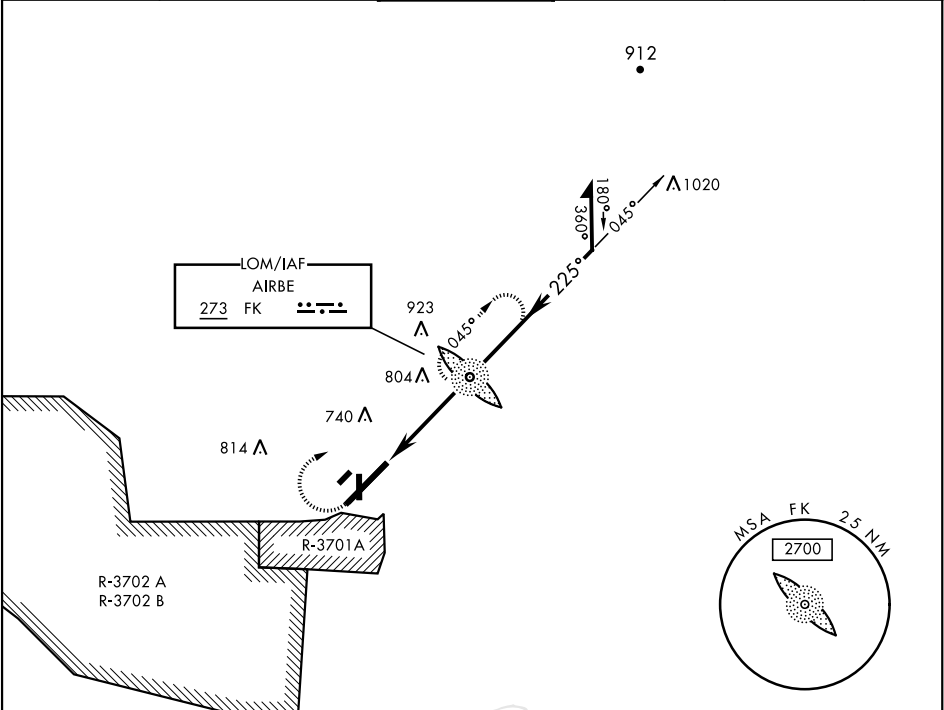

1200	2500	FK	Remain within 10 NM	
VGSI and descent angles not coincident.		NDB LOM	045°	2500
			225°	2100
			3.17°	TCH 55
		4.4 NM		
CATEGORY	A	B	C	D
S-23*	1120/40	549 (600-¾)	1120/60	549 (600-1½)
CIRCLING**	1120-1	549 (600-1)	1120-1½ 549 (600-1½)	1140-2 569 (600-2)

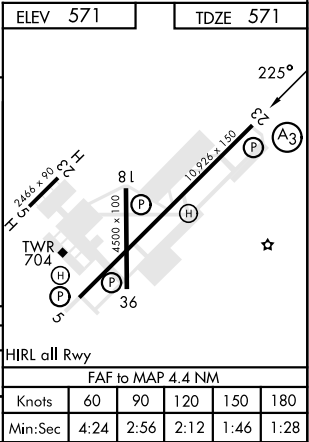

NDB RWY 23

SE-1, 22 FEB 2024 to 21 MAR 2024

SE-1, 22 FEB 2024 to 21 MAR 2024