
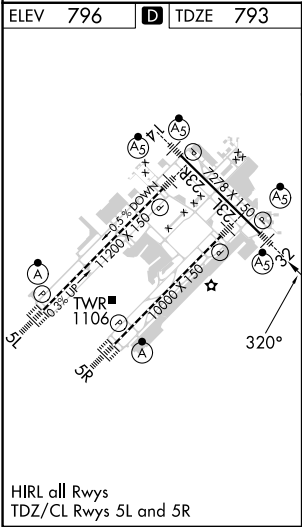


WAAS CH 62802 W32A	APP CRS 320°	Rwy Idg 7278 TDZE 793 Apt Elev 796
--	------------------------	---

RNAV (GPS) Y RWY 32

INDIANAPOLIS INTL (IND)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. **RVR 1800 authorized with use of FD or AP or HUD to DA.			MALSR AS	MISSED APPROACH: Climb to 3000 direct KEADY and hold.	
D-ATIS 134.25	INDIANAPOLIS APP CON 128.175 317.8	INDY TOWER 120.9 257.8	GND CON 121.9	CLNC DEL 128.75 257.8	CPDLC

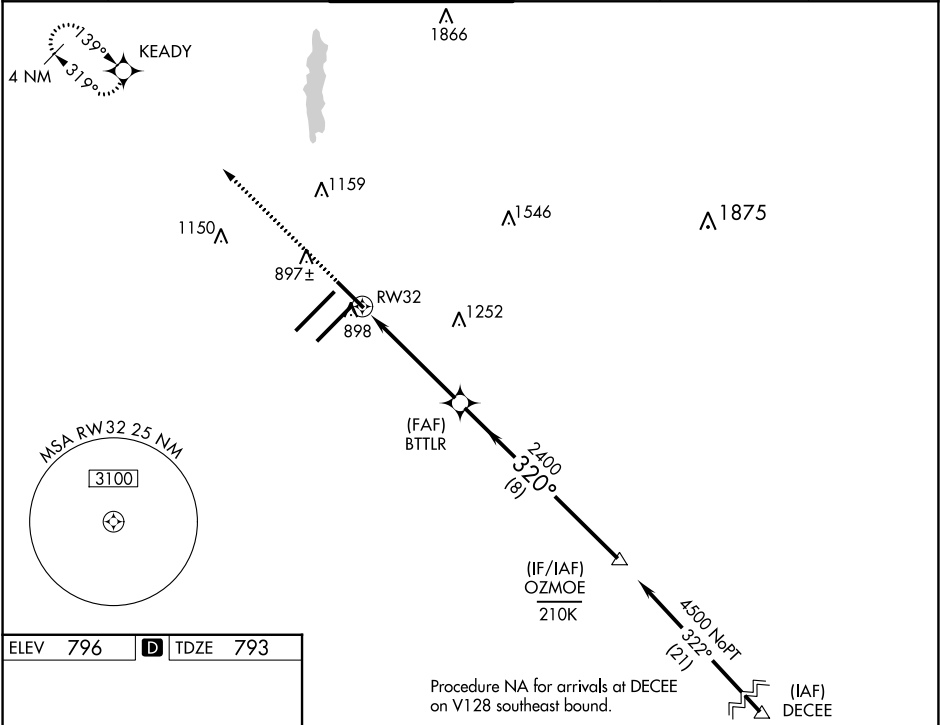

3000 KEADY		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).		OZMOE	
*LNAV only		*1 NM to RWY32		4500	
BTTLR		2400		GP 3.00° TCH 53	
RWY32		2400			
1 NM		3.9 NM		8 NM	
CATEGORY	A	B	C	D	
LPV DA	** 993/24		200 (200-½)		
LNAV/VNAV DA	1069/24		276 (300-½)		
LNAV MDA	1160/24		367 (400-½)		
CIRCLING	1420-1		624 (700-1)		
		1420-1 3/4		1560-2 1/2	
		624 (700-1 3/4)		764 (800-2 1/2)	