

WAAS CH 58107 W13A	APP CRS 129°	Rwy Idg TDZE 1005 Apt Elev 1008
--	------------------------	---

RNAV (GPS) RWY 13


GRINNELL RGNL (GGI)

⚠

When local altimeter setting not received, use Newton altimeter setting and increase all DAs 38 feet and all MDAs 40 feet, increase LPV and LNAV/VNAV visibility ¼ mile all Cats and LNAV Cat C visibility ¼ mile. Baro-VNAV NA when using Newton altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F).
Visibility reduction by helicopters NA. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct PICRA and hold.

AWOS-3 120.725	CHICAGO CENTER 127.05 282.35	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

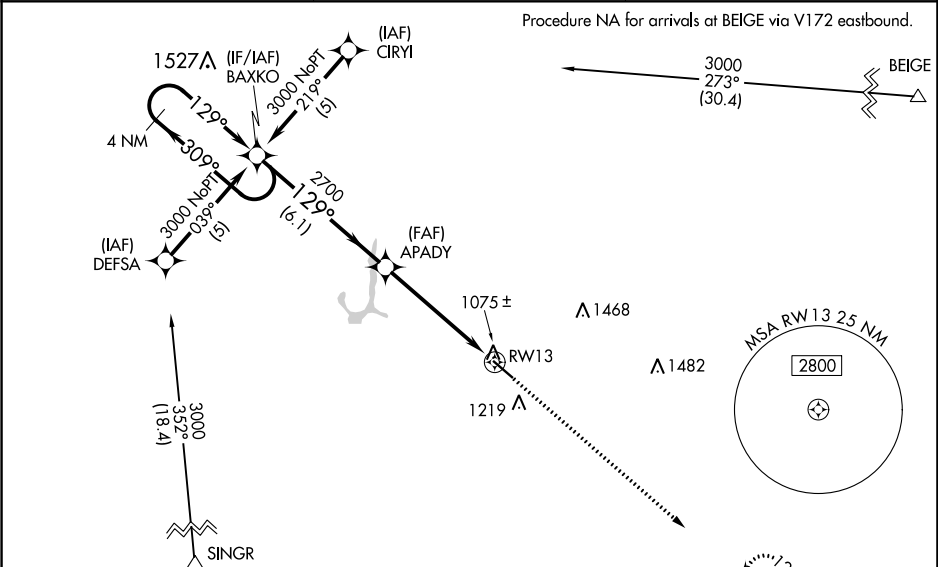

ELEV 1008

TDZE 1005

REIL Rwys 13 and 31

MIRL Rwy 13-31

4 NM Holding Pattern					3000	PICRA
BAXKO					APADY	RW13
3000 ← 309°					129° →	
GP 3.00°					2700	
TCH 34					6.1 NM	5.2 NM
CATEGORY	A	B	C	D		
LPV DA	1284-1 279 (300-1)				NA	
LNAV/VNAV DA	1415-1½ 410 (500-1½)				NA	
LNAV MDA	1480-1	475 (500-1)	1480-1¼ 475 (500-1¼)	NA		
CIRCLING	1620-1	612 (700-1)	1620-1¾ 612 (700-1¾)	NA		



APP CRS	Rwy Idg	5000
309°	TDZE	1008
	Apt Elev	1008


RNAV (GPS) RWY 31

GRINNELL RGNL (GGI)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct BAXKO and hold.
▼ ⚠ When local altimeter setting not received, use Newton altimeter setting and increase all MDA 40 feet and LNAV visibility Cat C ½ SM. Rwy 31 helicopter visibility reduction below ¾ SM NA. VDP NA when using Newton altimeter setting.	

AWOS-3 120.725	CHICAGO CENTER 127.05 282.35	UNICOM 122.8 (CTAF) 0
-------------------	---------------------------------	--------------------------

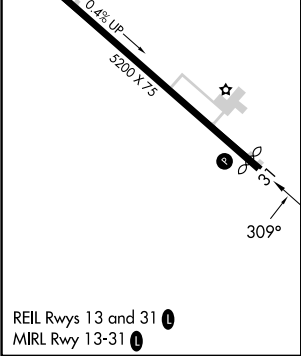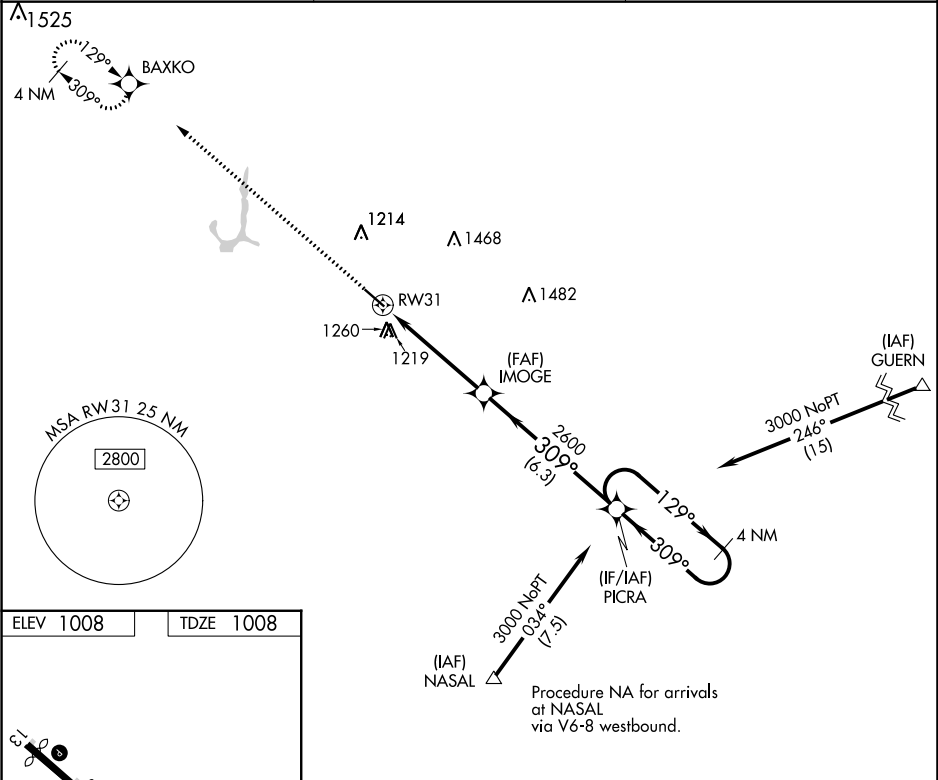

3000	BAXKO				
					
					
CATEGORY	A		B	C	D
LNAV MDA	1560-1 552 (600-1)		1560-1½ 552 (600-1½)	NA	
CIRCLING	1620-1 612 (700-1)		1620-1¾ 612 (700-1¾)	NA	

VOR/DME TNU	APP CRS	Rwy Idg	5000
112.5	282°	TDZE	1008
Chan 72		Apt Elev	1008

VOR/DME RWY 31

GRINNELL RGNL (GGI)

▼

▲

When local altimeter setting not received, use Newton altimeter setting and increase all MDAs 40 feet.
Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 2700 then right turn via TNU VOR/DME R-102 to FRUIT/TNU 23 DME and hold.

AWOS-3 120.725	CHICAGO CENTER 127.05 282.35	UNICOM 122.8 (CTAF) 0
-------------------	---------------------------------	--------------------------

