

WAAS CH 53701 W06A	APP CRS 059°	Rwy Idg TDZE Apt Elev	5500 547 547
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 6

MUSCATINE MUNI (MUT)

DME/DME RNP-0.3 NA. Visibility reductions by helicopters NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 48°C (118°F). If local altimeter setting not received, use Iowa City Muni altimeter setting and increase all DAs/MDAs 80 feet. Baro-VNAV and VDP NA when using Iowa City Muni altimeter setting.

MISSED APPROACH: Climb to 3000 direct EDAGE and hold.

AWOS-3P 120.625	QUAD CITY APP CON ★ 133.275 257.8	CLNC DEL 119.125	UNICOM 122.7 (CTAF) 0
---------------------------	---	----------------------------	---------------------------------

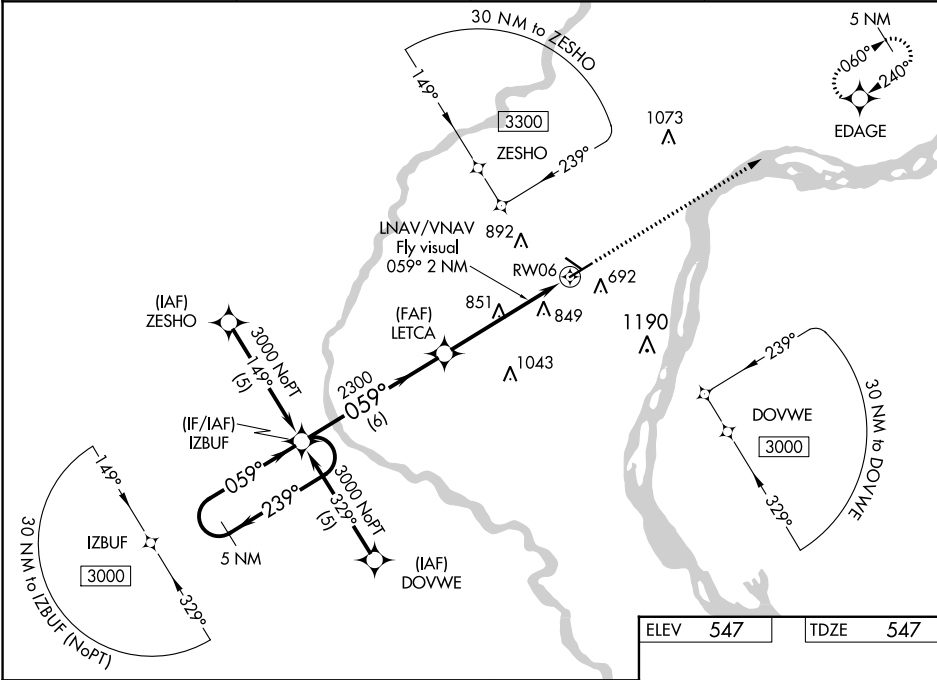

5 NM Holding Pattern		VGSIs and RNAV glidepath not coincident (VGSIs Angle 3.00/TCH 37°).		3000	EDAGE
IZBUF		LETCA		RNAV/VNAV Fly visual 059° 2 NM	
GP 3.00° TCH 45		*1.7 NM to RWY 06		RWY 06	
3000		2300		5500 X 100	
239°		059°		633	
059°		059°		059°	
6 NM		3.6 NM		12	
CATEGORY		A		B	
LPV DA		1076-2		529 (600-2)	
LNAV/VNAV DA		1232-2		685 (700-2)	
LNAV MDA		1120-1		573 (600-1)	
CIRCLING		1120-2½		573 (600-2½)	
		1200-2½		653 (700-2½)	
		1500-3		953 (1000-3)	