


RADAR required	Rwy	Knots	60	120	180	240	300	360
	H1	V/V(fpm)	500	1000	1500	2000	2500	3000

Minimum Climb Rate to 500

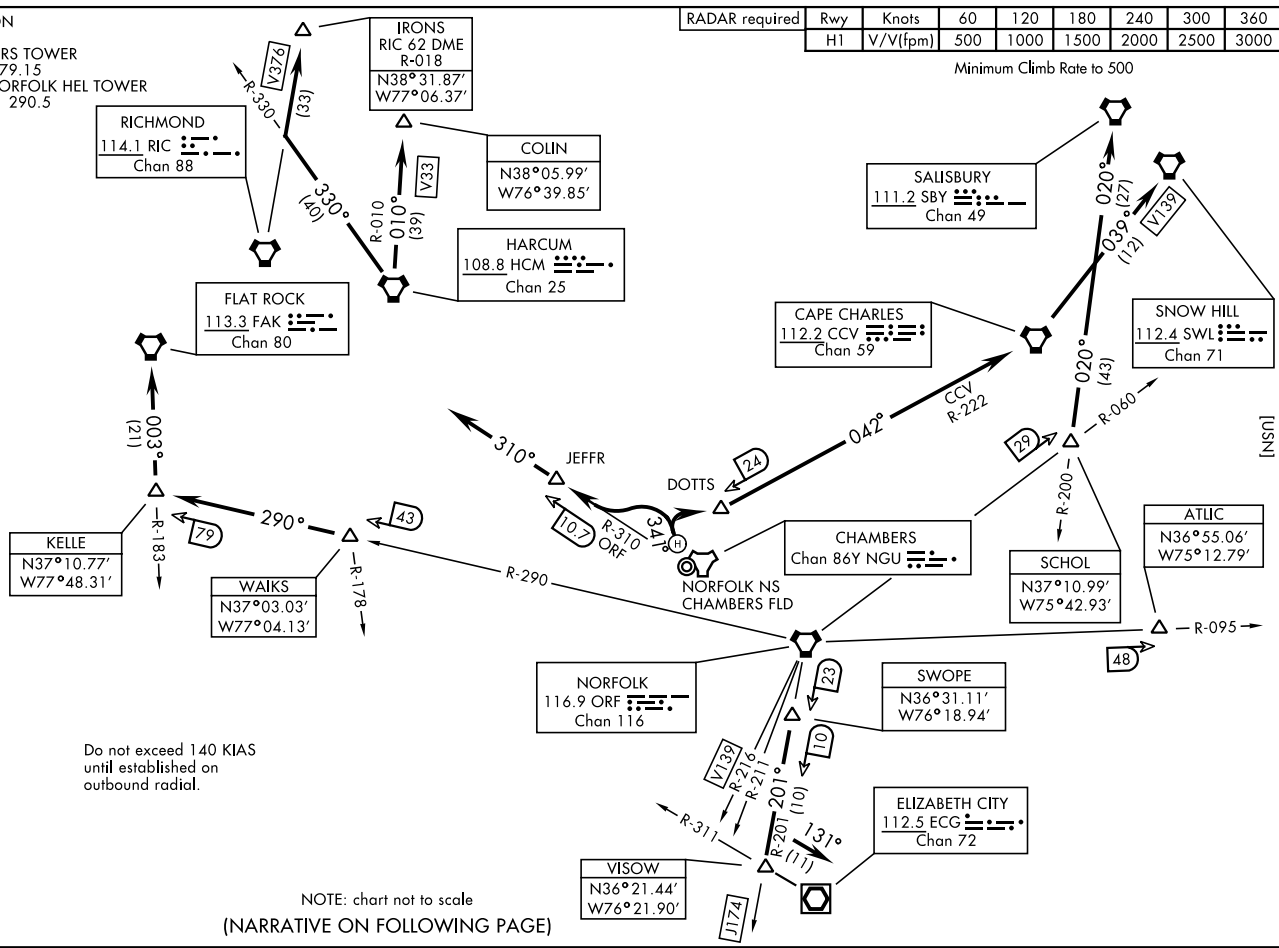

▼ [USN] DEPARTURE ROUTE DESCRIPTION	
<u>TAKEOFF HELIPORT WESTBOUND:</u> Climb heading 341° then climbing left turn to JEFFR, minimum climb rate 500 ft./NM to 500, thence...	
<u>TAKEOFF HELIPORT EASTBOUND:</u> Climb heading 341° then climbing right turn to DOTTS, minimum climb rate 500 ft./NM to 500, thence...	
... via RADAR vectors to assigned transition. Maintain 2000 or assigned altitude. Expect clearance to requested altitude/flight level 10 minutes after departure.	
<u>ATLIC TRANSITION (NHU2•ATLIC):</u> Via vectors to ATLIC.	
<u>CAPE CHARLES TRANSITION (NHU2•CCV):</u> Via vectors to CCV VORTAC. (NOTE: For altitudes 5000 and below).	
<u>ELIZABETH CITY TRANSITION (NHU2•ECG):</u> Via vectors to SWOPE, then via ORF VORTAC R-201 to VISOW (ORF R-201 / 33 DME), then direct ECG VOR/DME.	
<u>FLAT ROCK TRANSITION (NHU2•FAK):</u> Via vectors to WAKS, then via ORF VORTAC R-290 to KELLE, then direct FAK VORTAC.	
<u>HARCUM TRANSITION (NHU2•HCM):</u> * Via vectors to HCM VORTAC.	
<u>SALSBURY TRANSITION (NHU2•SBY):</u> Via vectors to SCHOL, then SBY R-200 to SBY VORTAC.	
<u>SNOW HILL TRANSITION (NHU2•SWL):</u> Via vectors to SCHOL, thence SBY R-200 to V139 to SWL VORTAC.	
<u>V139 TRANSITION (NHU2•ORF):</u> Via vectors to V139.	
* For routing to NHK/BWI/MTN/DCA METRO AREA via the following: NHK-V33 COLIN V213 PXT. (NOTE: For altitudes 7000 or 9000 only.) BWI/MTN-V33 COLIN V213 PXT V93 GRACO. (NOTE: For altitudes 7000 or 9000 only.) DCA/ADW/DAA-HCM R-330 V376 IRONS. (NOTE: For altitude 8000 only.)	
NOTE: Transitions are part of the Preferred Departure Route (PDR) system and established as an Air Traffic flow procedure from the Norfolk Terminal Area. These fixes are to be used as the initial filing point out of NS Norfolk.	