

WAAS CH 58204 W17A	APP CRS 168°	Rwy Idg 6501 TDZE 17 Apt Elev 17
--	------------------------	---


RNAV (GPS) RWY 17
TRENT LOTT INTL (PQL)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.
When local altimeter setting not received, use Mobile Rgnl altimeter setting; increase LPV DA to 292 feet and LNAV/VNAV DA to 357 feet; increase LNAV/VNAV all visibilities 1/8 SM. Increase all MDA 80 feet and LNAV Cat C/D visibility 1/4 SM and Circling Cat C/D visibility 1/2 SM. Baro-VNAV and VDP NA with Mobile Rgnl altimeter setting. For inop ALS when using Mobile Rgnl altimeter setting increase LPV all Cats visibility to 7/8 SM.

MALSR
MISSED APPROACH: Climb to 800 then climbing left turn to 1800 direct BEZJU and hold.

ATIS 135.175	MOBILE APP CON ★ 121.0 307.1	TRENT LOTT TOWER ★ 118.575 (CTAF) 0	GND CON 121.725	CLNC DEL 121.725	UNICOM 122.8
------------------------	--	---	---------------------------	----------------------------	------------------------

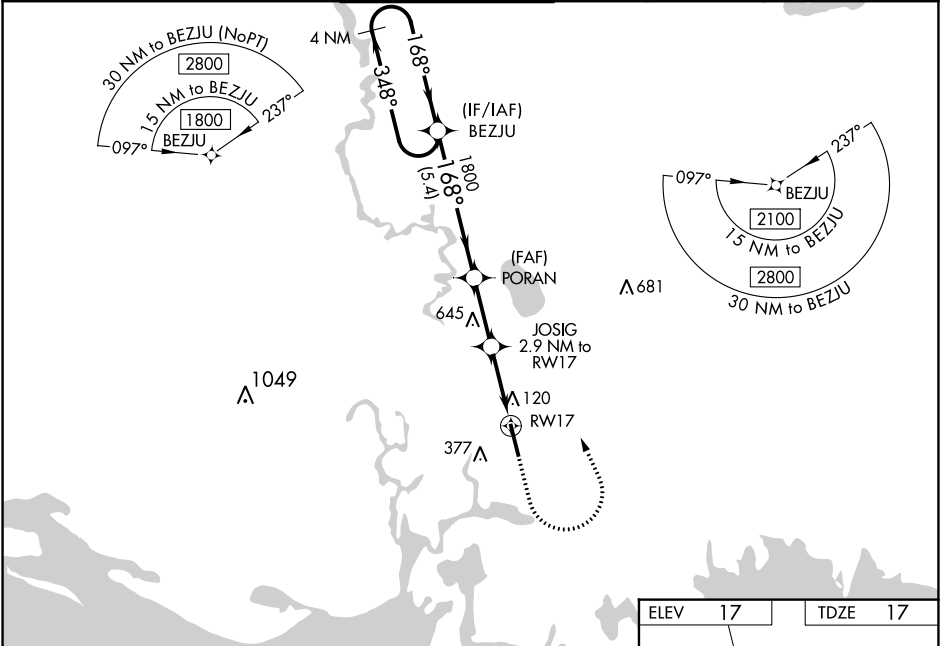

4 NM Holding Pattern		BEZJU	PORAN	JOSIG	1 NM to RWY 17	800	1800	BEZJU
1800		168°	1800	980	1 NM to RWY 17	1800	168°	BEZJU
GP 3.00°		168°	1800	980	1 NM to RWY 17	1800	168°	BEZJU
TCH 50		168°	1800	980	1 NM to RWY 17	1800	168°	BEZJU
5.4 NM		2.5 NM	1.9 NM	1 NM	1 NM	1 NM	1 NM	1 NM
CATEGORY	A	B	C	D				
LPV DA	217-1/2		200 (200-1/2)					
LNAV/VNAV DA	282-1/2		265 (300-1/2)					
LNAV MDA	380-1/2	363 (400-1/2)	380-5/8	363 (400-5/8)				
CIRCLING	480-1	680-1	680-1 3/4	680-2				
	463 (500-1)	663 (700-1)	663 (700-1 3/4)	663 (700-2)				

