

WAAS CH 42529 W28A	APP CRS 267°	Rwy Idg 3001 TDZE 14 Apt Elev 14
--	------------------------	---

RNAV (GPS) RWY 28



 When local altimeter setting not received, use Hooper Bay altimeter setting and increase all MDA 360 feet increase LP Cat B visibility
 ¼ mile. Circling NA south of Rwy 10-28. DME/DME RNP-0.3 NA.
 -21°C Procedure NA at night. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing right turn to 4000 direct AKELT and hold.

AWOS-3P
118.425

ANCHORAGE CENTER
124.5

UNICOM
123.0 (CTAF) **L**

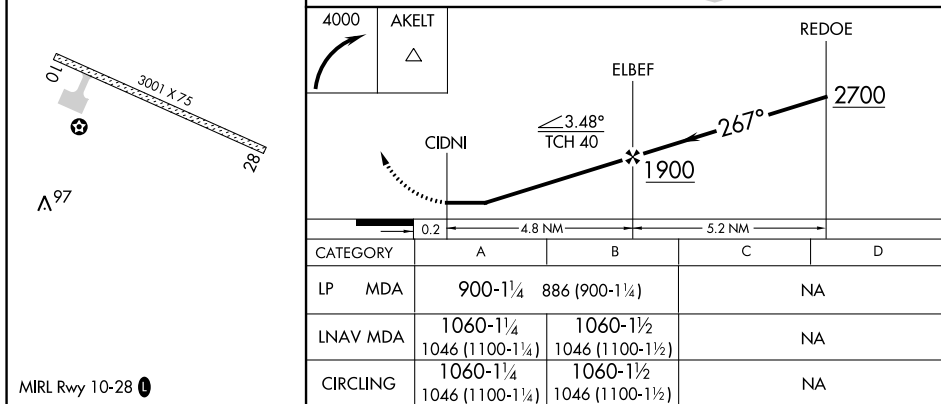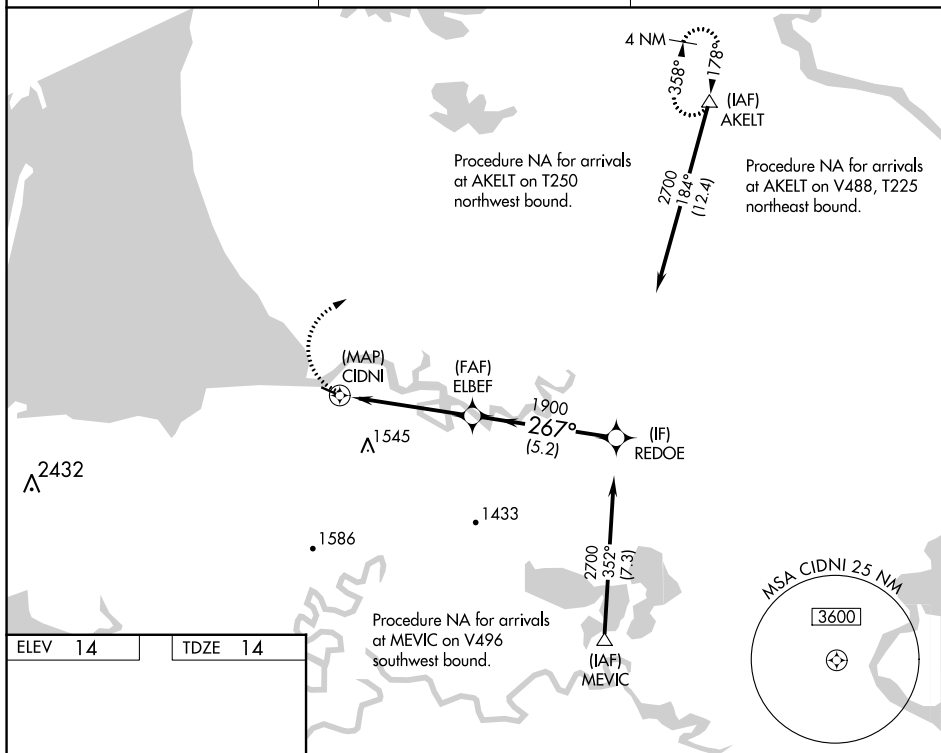

CATEGORY	A	B	C	D
LP MDA	900-1¼	886 (900-1¼)	NA	
LNAV MDA	1060-1¼	1060-1½	NA	
	1046 (1100-1¼)	1046 (1100-1½)		
CIRCLING	1060-1¼	1060-1½	NA	
	1046 (1100-1¼)	1046 (1100-1½)		