

WAAS CH 82707 W30B	APP CRS 295°	Rwy Idg 9000 TDZE 5599 Apt Elev 5673
--	------------------------	---

RNAV (GPS) RWY 30R
ROCKY MOUNTAIN METRO (BJC)

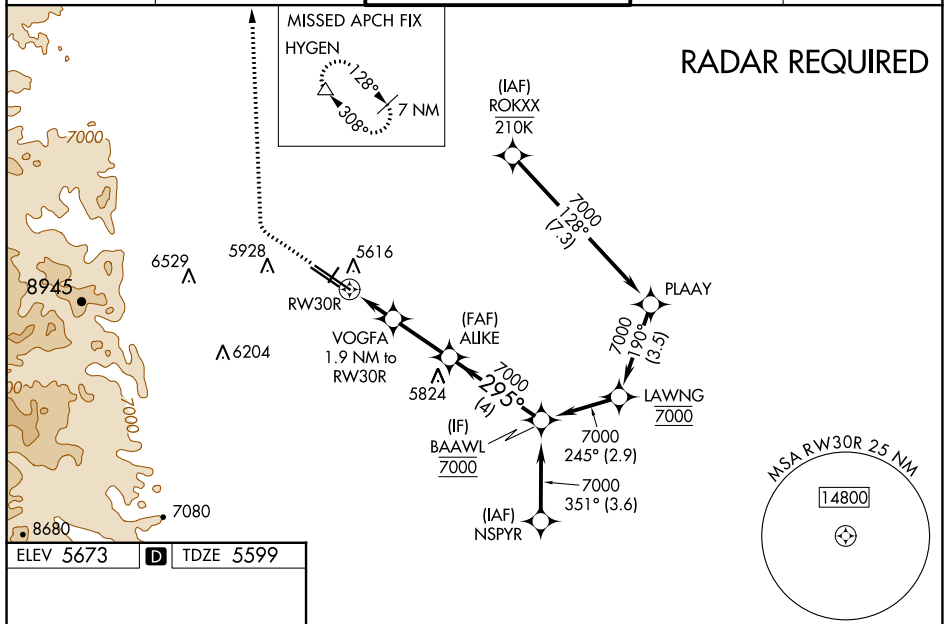
T Baro-VNAV and VDP NA when using Denver Int'l altimeter setting. For uncompensated **A** **NA** Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 47°C (116°F) DME/DME RNP-0.3 NA. When local altimeter setting not received, use Denver Int'l altimeter setting and increase all DA 82 feet and all MDA 100 feet, increase LNAV/VNAV all Cats, LNAV Cat C/D and Circling Cat C visibility ¼ mile. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to ½ mile and LNAV Cat C/D visibility to 1 mile. For inoperative MALSR, when using Denver Int'l altimeter setting, increase LPV all Cats visibility to 1 mile, LNAV/VNAV all Cats visibility to ½ mile and LNAV Cat A/B visibility to 1 mile and Cat D visibility to ½ mile.

MALSR



MISSED APPROACH: Climb to 6300 then climbing right turn to 10300 direct HYGEN and hold, continue climb-in-hold to 10300.

ATIS 126.25	DENVER APP CON 125.12 263.02	METRO TOWER ★ 118.6 (CTAF) 0 233.7	GND CON 121.7	CLNC DEL 132.6
-----------------------	--	--	-------------------------	--------------------------

[illegible]